

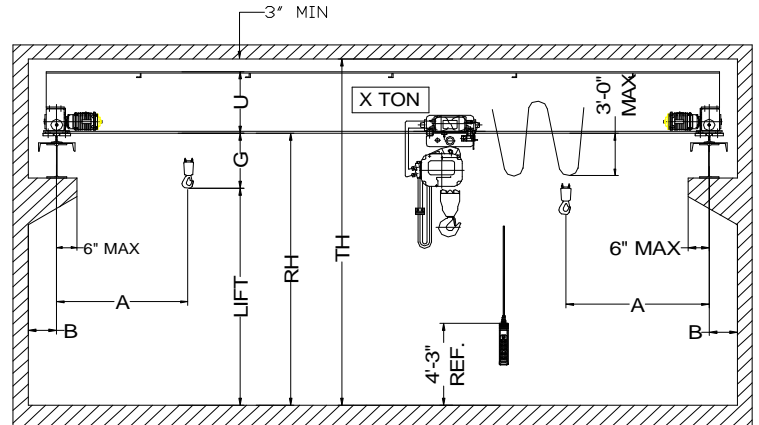


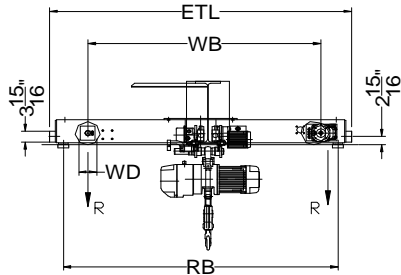

42827 Irwin Drive  
 Harrison Twp. MI 48045 USA  
 P/ 586-468-0909 F/ 586-468-2711  
 E/ info@mccrane.com W/ mccrane.com

**DIMENSIONS & WEIGHTS - TYPE TRSGCH  
 5-TON TOP RUNNING SINGLE  
 GIRDER CRANE WITH CHAIN HOIST**

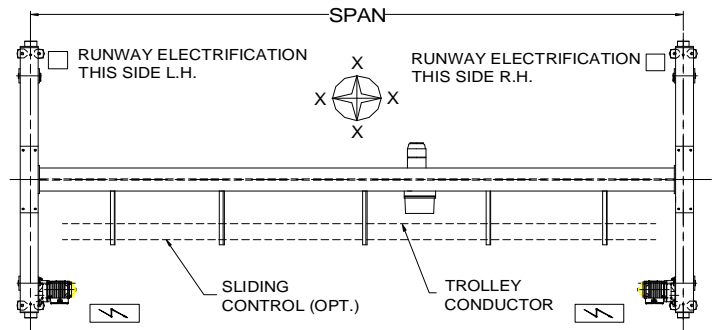

HOIST MFG: HARRINGTON      TROLLEY MFG: HARRINGTON      ENDTRUCK MFG.: HARRINGTON

CRANE DATA TABLE PART-A

CRANE MODEL #	CRANE CAP. U.S. TONS	SPAN FEET	DIMENSIONS								LIFT (FT)	BRIDGE WT. LBS.	TROLLEY WT. LBS.	SHIP WT. LBS.	MAX. WL R (LBS)
			A (IN)	B (IN)	G (IN)	U (IN)	WB (IN)	RB (IN)	ETL (IN)						
TRSGCH-05-18	5	18	34	8	34	15	43	54	62	20	1,820	547	2,367	4,898	
TRSGCH-05-22	5	22	34	8	34	15	43	54	62	20	2,280	547	2,827	5,164	
TRSGCH-05-26	5	26	34	8	34	17	43	54	62	20	2,752	547	3,299	5,387	
TRSGCH-05-30	5	30	34	8	34	17	43	54	62	20	3,092	547	3,639	5,548	
TRSGCH-05-34	5	34	34	8	34	19	43	54	62	20	3,738	547	4,285	5,769	
TRSGCH-05-38	5	38	34	8	34	19	74	90	99	20	4,664	547	5,211	6,046	
TRSGCH-05-42	5	42	34	8	34	19	74	90	99	20	5,542	547	6,089	6,303	
TRSGCH-05-46	5	46	34	8	34	22	74	90	99	20	6,186	547	6,733	6,495	
TRSGCH-05-50	5	50	34	8	34	25	74	90	99	20	7,462	547	8,009	6,840	
TRSGCH-05-54	5	54	34	8	34	25	74	90	99	20	8,758	547	9,305	7,186	
TRSGCH-05-58	5	58	34	8	34	28	74	90	99	20	10,224	547	10,771	7,572	

CRANE DATA TABLE PART-B

CRANE MODEL #	ENDTRUCK MODEL #	TROLLEY-HOIST MODEL #	HOIST SPD FPM	HOIST HP	TROLLEY SPD FPM	TROLLEY HP	BRIDGE SPD FPM	BRIDGE HP.	TROLLEY WD (IN)	BRIDGE WD (IN)	STD. POWER	FULL LOAD AMPS 460V	ASCE RAIL
TRSGCH-05-18	TMS-3-0535	NERM-050LD-L-20	11/2 TS	4.70	40 SS	1.00	80 VFC	2 X 0.33	5.51	6.10	460	15	30/40
TRSGCH-05-22	TMS-3-0535	NERM-050LD-L-20	11/2 TS	4.70	40 SS	1.00	80 VFC	2 X 0.33	5.51	6.10	460	15	30/40
TRSGCH-05-26	TMS-3-0535	NERM-050LD-L-20	11/2 TS	4.70	40 SS	1.00	80 VFC	2 X 0.33	5.51	6.10	460	15	30/40
TRSGCH-05-30	TMS-3-0535	NERM-050LD-L-20	11/2 TS	4.70	40 SS	1.00	80 VFC	2 X 0.33	5.51	6.10	460	15	30/40
TRSGCH-05-34	TMS-3-0535	NERM-050LD-L-20	11/2 TS	4.70	40 SS	1.00	80 VFC	2 X 0.33	5.51	6.10	460	15	30/40
TRSGCH-05-38	TMS-3-0560	NERM-050LD-L-20	11/2 TS	4.70	40 SS	1.00	80 VFC	2 X 0.50	5.51	8.27	460	17	30/40
TRSGCH-05-42	TMS-3-0560	NERM-050LD-L-20	11/2 TS	4.70	40 SS	1.00	80 VFC	2 X 0.50	5.51	8.27	460	17	30/40
TRSGCH-05-46	TMS-3-0560	NERM-050LD-L-20	11/2 TS	4.70	40 SS	1.00	80 VFC	2 X 0.50	5.51	8.27	460	17	30/40
TRSGCH-05-50	TMS-3-0560	NERM-050LD-L-20	11/2 TS	4.70	40 SS	1.00	80 VFC	2 X 0.50	5.51	8.27	460	17	30/40
TRSGCH-05-54	TMS-3-0560	NERM-050LD-L-20	11/2 TS	4.70	40 SS	1.00	80 VFC	2 X 0.50	5.51	8.27	460	17	30/40
TRSGCH-05-58	TMS-3-0560	NERM-050LD-L-20	11/2 TS	4.70	40 SS	1.00	80 VFC	2 X 0.50	5.51	8.27	460	17	30/40

SPEED CODES:	SS	SINGLE SPEED OPERATION WITH SOFT START
	TS	TWO SPEED OPERATION WITH SOFT START
	VFC	VARIABLE SPEED CONTROL 2-STEP INFINITELY VARIABLE

GENERAL NOTES:  
 DIMENSIONS "RH" AND "TH" ARE SPECIFIED BY CUSTOMER  
 DIMENSION "A" IS APPROX. AND DOES NOT CONSIDER MAINLINE  
 WHEEL LOAD "R" DOES NOT INCLUDE IMPACT  
 CRANE ALSO AVAILABLE AT 208V/3/60 AND 230/3/60 POWER