

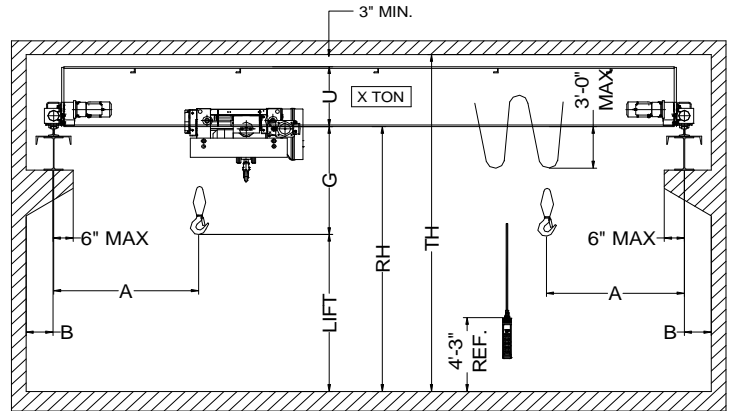




42827 Irwin Drive  
Harrison Twp. MI 48045 USA  
P/ 586-468-0909 F/ 586-468-2711  
E/ info@mccrane.com W/ mccrane.com

**DIMENSIONS & WEIGHTS - TYPE TRSGWR  
15-TON TOP RUNNING SINGLE  
GIRDER CRANE WITH WIRE ROPE HOIST**

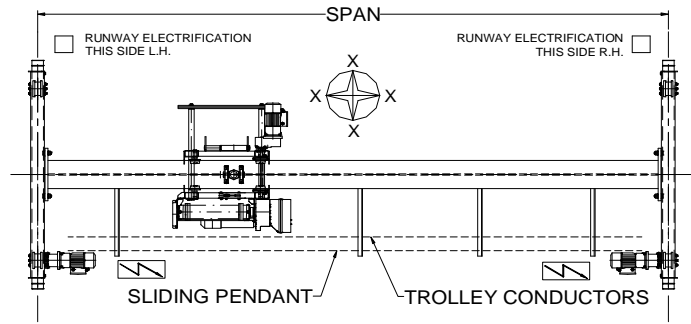

HOIST MFG:	STAHL	TROLLEY MFG:	STAHL	ENDTRUCK MFG.:	STAHL
------------	-------	--------------	-------	----------------	-------

CRANE DATA TABLE PART-A

CRANE MODEL #	CRANE CAP. U.S. TONS	SPAN FEET	DIMENSIONS									BRIDGE WT. LBS.	TROLLEY WT. LBS.	SHIP WT. LBS.	MAX. WL R (LBS)
			A (IN)	B (IN)	G (IN)	U (IN)	WB (IN)	REEVING	ETL (IN)	LIFT (FT)					
TRSGWR-15-18	15	18	50	8	32	24	99	4PS-12mm	130	20	4,946	1,800	6,746	13,456	
TRSGWR-15-22	15	22	50	8	32	24	99	4PS-12mm	130	20	5,534	1,800	7,334	14,272	
TRSGWR-15-26	15	26	50	8	34	27	99	4PS-12mm	130	20	6,486	1,800	8,286	14,973	
TRSGWR-15-30	15	30	50	8	34	27	99	4PS-12mm	130	20	7,610	1,800	9,410	15,594	
TRSGWR-15-34	15	34	50	8	34	27	99	4PS-12mm	130	20	8,318	1,800	10,118	16,031	
TRSGWR-15-38	15	38	50	8	34	27	99	4PS-12mm	130	20	9,026	1,800	10,826	16,413	
TRSGWR-15-42	15	42	50	8	34	30	99	4PS-12mm	130	20	10,406	1,800	12,206	16,924	
TRSGWR-15-46	15	46	50	8	34	33	99	4PS-12mm	130	20	11,776	1,800	13,576	17,404	
TRSGWR-15-50	15	50	50	8	34	38	99	4PS-12mm	130	20	11,050	1,800	12,850	17,338	
TRSGWR-15-54	15	54	50	8	34	38	99	4PS-12mm	130	20	12,020	1,800	13,820	17,678	
TRSGWR-15-58	15	58	50	8	34	38	99	4PS-12mm	130	20	13,030	1,800	14,830	18,015	
TRSGWR-15-62	15	62	50	8	34	43	99	4PS-12mm	130	20	14,142	1,800	15,942	18,367	
TRSGWR-15-66	15	66	50	8	34	43	124	4PS-12mm	155	20	16,164	1,800	17,964	18,937	
TRSGWR-15-70	15	70	50	8	34	43	124	4PS-12mm	155	20	17,540	1,800	19,340	19,339	
TRSGWR-15-74	15	74	50	8	34	43	124	4PS-12mm	155	20	18,980	1,800	20,780	19,750	
TRSGWR-15-78	15	78	50	8	34	47	124	4PS-12mm	155	20	22,120	1,800	23,920	20,581	
TRSGWR-15-82	15	82	50	8	34	47	124	4PS-12mm	155	20	23,900	1,800	25,700	21,067	

DASHED RED LINE INDICATES SINGLE WEB BEAM TO DOUBLE WEB BOX TRANSITION LINE

CRANE DATA TABLE PART-B

CRANE MODEL #	ENDTRUCK MODEL #	TROLLEY-HOIST MODEL #	HOIST SPD FPM	HOIST HP	TROLLEY SPD FPM	TROLLEY HP	BRIDGE SPD FPM	BRIDGE HP	TROLLEY WD (IN)	BRIDGE WD (IN)	STD. POWER	FULL LOAD AMPS 460V	ASCE RAIL
TRSGWR-15-18	KEL-S-315.3.25.140	KESH5032-16-4/1L2	16/2.6 TS	15.5/2.4	80/20 TS	0.9/0.2	128 VFC	2 X 2.0	5.51	12.40	460	34	40/60
TRSGWR-15-22	KEL-S-315.3.25.140	KESH5032-16-4/1L2	16/2.6 TS	15.5/2.4	80/20 TS	0.9/0.2	128 VFC	2 X 2.0	5.51	12.40	460	34	40/60
TRSGWR-15-26	KEL-S-315.3.25.140	KESH5032-16-4/1L2	16/2.6 TS	15.5/2.4	80/20 TS	0.9/0.2	128 VFC	2 X 2.0	5.51	12.40	460	34	40/60
TRSGWR-15-30	KEL-S-315.3.25.140	KESH5032-16-4/1L2	16/2.6 TS	15.5/2.4	80/20 TS	0.9/0.2	128 VFC	2 X 2.0	5.51	12.40	460	34	40/60
TRSGWR-15-34	KEL-S-315.3.25.140	KESH5032-16-4/1L2	16/2.6 TS	15.5/2.4	80/20 TS	0.9/0.2	128 VFC	2 X 2.0	5.51	12.40	460	34	40/60
TRSGWR-15-38	KEL-S-315.3.25.140	KESH5032-16-4/1L2	16/2.6 TS	15.5/2.4	80/20 TS	0.9/0.2	128 VFC	2 X 2.0	5.51	12.40	460	34	40/60
TRSGWR-15-42	KEL-S-315.3.25.140	KESH5032-16-4/1L2	16/2.6 TS	15.5/2.4	80/20 TS	0.9/0.2	128 VFC	2 X 2.0	5.51	12.40	460	34	40/60
TRSGWR-15-46	KEL-S-315.3.25.140	KESH5032-16-4/1L2	16/2.6 TS	15.5/2.4	80/20 TS	0.9/0.2	128 VFC	2 X 2.0	5.51	12.40	460	34	40/60
TRSGWR-15-50	KEL-S-315.3.25.140	KESH5032-16-4/1L2	16/2.6 TS	15.5/2.4	80/20 TS	0.9/0.2	128 VFC	2 X 2.0	5.51	12.40	460	34	40/60
TRSGWR-15-54	KEL-S-315.3.25.140	KESH5032-16-4/1L2	16/2.6 TS	15.5/2.4	80/20 TS	0.9/0.2	128 VFC	2 X 2.0	5.51	12.40	460	34	40/60
TRSGWR-15-58	KEL-S-315.3.25.140	KESH5032-16-4/1L2	16/2.6 TS	15.5/2.4	80/20 TS	0.9/0.2	128 VFC	2 X 2.0	5.51	12.40	460	34	40/60
TRSGWR-15-62	KEL-S-315.3.25.140	KESH5032-16-4/1L2	16/2.6 TS	15.5/2.4	80/20 TS	0.9/0.2	128 VFC	2 X 2.0	5.51	12.40	460	34	40/60
TRSGWR-15-66	KEL-S-315.3.31.140	KESH5032-16-4/1L2	16/2.6 TS	15.5/2.4	80/20 TS	0.9/0.2	128 VFC	2 X 2.0	5.51	12.40	460	34	40/60
TRSGWR-15-70	KEL-S-315.3.31.140	KESH5032-16-4/1L2	16/2.6 TS	15.5/2.4	80/20 TS	0.9/0.2	128 VFC	2 X 2.0	5.51	12.40	460	34	40/60
TRSGWR-15-74	KEL-S-315.3.31.140	KESH5032-16-4/1L2	16/2.6 TS	15.5/2.4	80/20 TS	0.9/0.2	128 VFC	2 X 2.0	5.51	12.40	460	34	40/60
TRSGWR-15-78	KEL-E-315.5.31.140	KESH5032-16-4/1L2	16/2.6 TS	15.5/2.4	80/20 TS	0.9/0.2	128 VFC	2 X 2.0	5.51	12.40	460	34	40/60
TRSGWR-15-82	KEL-E-315.5.31.140	KESH5032-16-4/1L2	16/2.6 TS	15.5/2.4	80/20 TS	0.9/0.2	128 VFC	2 X 2.0	5.51	12.40	460	34	40/60

SPEED CODES:	SS	SINGLE SPEED OPERATION WITH SOFT START
	TS	TWO SPEED OPERATION WITH SOFT START
	VFC	VARIABLE SPEED CONTROL 2-STEP INFINITELY VARIABLE

\* TROLLEY OPTION AVAILABLE AT 40/10 FPM T/S OR 80/20 FPM VFC  
\*\* BRIDGE OPTION AVAILABLE AT 80 FPM VFC OR 160/40 FPM VFC

GENERAL NOTES:  
DIMENSIONS "RH" AND "TH" ARE SPECIFIED BY CUSTOMER  
DIMENSION "A" IS APPROX. AND DOES NOT CONSIDER MAINLINE  
WHEEL LOAD "R" DOES NOT INCLUDE IMPACT