

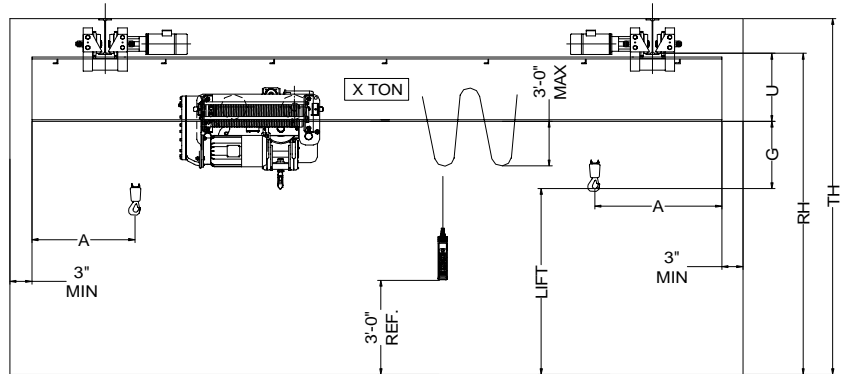


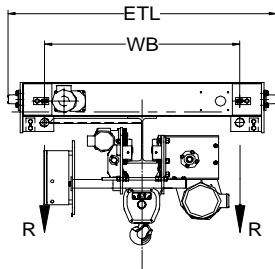

42827 Irwin Drive  
 Harrison Twp. MI 48045 USA  
 P/ 586-468-0909 F/ 586-468-2711  
 E/ info@mccrane.com W/ mccrane.com

**DIMENSIONS & WEIGHTS - TYPE URSGWS  
 7.5-TON UNDER RUNNING SINGLE  
 GIRDER CRANE WITH WIRE ROPE HOIST**

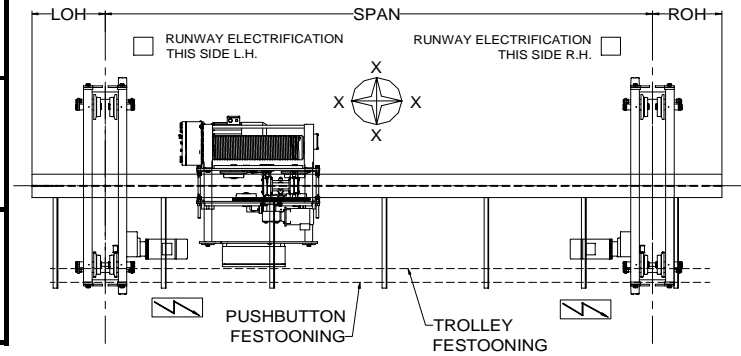

HOIST MFG: SHAW BOX OR YALE      TROLLEY MFG: SHAW BOX OR YALE      ENDTRUCK MFG.: CRANESOURCE

CRANE DATA TABLE PART-A

CRANE MODEL #	CRANE CAP. U.S. TONS	SPAN FEET	DIMENSIONS								BRIDGE WT. LBS.	TROLLEY WT. LBS.	SHIP WT. LBS.	MAX. W/L R (LBS)
			A (IN)	OH (IN)	G (IN)	U (IN)	WB (IN)	REEVING	ETL (IN)	LIFT (FT)				
URSGWS-07-18	7.5	18	48	12	27	21	72	4PS-12mm	96	25	3,451	1,750	5,201	7,842
URSGWS-07-22	7.5	22	48	12	27	21	72	4PS-12mm	96	25	4,155	1,750	5,905	8,272
URSGWS-07-26	7.5	26	48	12	27	21	72	4PS-12mm	96	25	4,559	1,750	6,309	8,548
URSGWS-07-30	7.5	30	48	12	27	21	72	4PS-12mm	96	25	5,315	1,750	7,065	8,866
URSGWS-07-34	7.5	34	48	12	27	24	72	4PS-12mm	96	25	5,763	1,750	7,513	9,077
URSGWS-07-38	7.5	38	48	12	27	24	72	4PS-12mm	96	25	6,571	1,750	8,321	9,357
URSGWS-07-42	7.5	42	48	12	27	27	72	4PS-12mm	96	25	7,539	1,750	9,289	9,662
URSGWS-07-46	7.5	46	48	12	27	27	72	4PS-12mm	96	25	8,739	1,750	10,489	10,014
URSGWS-07-50	7.5	50	48	12	27	27	90	4PS-12mm	112	25	10,265	1,750	12,015	10,439
URSGWS-07-54	7.5	54	48	12	27	30	90	4PS-12mm	112	25	11,749	1,750	13,499	10,847
URSGWS-07-58	7.5	58	48	12	27	33	90	4PS-12mm	112	25	13,173	1,750	14,923	11,235

(R OR L)

CRANE DATA TABLE PART-B

CRANE MODEL #	ENDTRUCK MODEL #	TROLLEY-HOIST MODEL #	HOIST SPD FPM	HOIST HP	TROLLEY SPD FPM	TROLLEY HP	BRIDGE SPD FPM	BRIDGE HP	TROLLEY WD (IN)	BRIDGE WD (IN)	STD. POWER	FULL LOAD AMPS 460V	R.WAY FLG (IN)
URSGWS-07-18	10/48UD195	WC3M07-025S20-S	20/5 TS	15/3.75	50/17 TS	0.75/0.25	95 VFC	2 X 1.0	6.00	8.00	460	36	5.50-12.0
URSGWS-07-22	10/48UD195	WC3M07-025S20-S	20/5 TS	15/3.75	50/17 TS	0.75/0.25	95 VFC	2 X 1.0	6.00	8.00	460	36	5.50-12.0
URSGWS-07-26	10/48UD195	WC3M07-025S20-S	20/5 TS	15/3.75	50/17 TS	0.75/0.25	95 VFC	2 X 1.0	6.00	8.00	460	36	5.50-12.0
URSGWS-07-30	10/48UD195	WC3M07-025S20-S	20/5 TS	15/3.75	50/17 TS	0.75/0.25	95 VFC	2 X 1.0	6.00	8.00	460	36	5.50-12.0
URSGWS-07-34	10/48UD195	WC3M07-025S20-S	20/5 TS	15/3.75	50/17 TS	0.75/0.25	95 VFC	2 X 1.0	6.00	8.00	460	36	5.50-12.0
URSGWS-07-38	10/48UD195	WC3M07-025S20-S	20/5 TS	15/3.75	50/17 TS	0.75/0.25	95 VFC	2 X 1.0	6.00	8.00	460	36	5.50-12.0
URSGWS-07-42	10/48UD195	WC3M07-025S20-S	20/5 TS	15/3.75	50/17 TS	0.75/0.25	95 VFC	2 X 1.0	6.00	8.00	460	36	5.50-12.0
URSGWS-07-46	10/48UD195	WC3M07-025S20-S	20/5 TS	15/3.75	50/17 TS	0.75/0.25	95 VFC	2 X 1.0	6.00	8.00	460	36	5.50-12.0
URSGWS-07-50	10/60UD195	WC3M07-025S20-S	20/5 TS	15/3.75	50/17 TS	0.75/0.25	95 VFC	2 X 1.0	6.00	8.00	460	36	5.50-12.0
URSGWS-07-54	10/60UD195	WC3M07-025S20-S	20/5 TS	15/3.75	50/17 TS	0.75/0.25	95 VFC	2 X 1.0	6.00	8.00	460	36	5.50-12.0
URSGWS-07-58	10/60UD195	WC3M07-025S20-S	20/5 TS	15/3.75	50/17 TS	0.75/0.25	95 VFC	2 X 1.0	6.00	8.00	460	36	5.50-12.0

SPEED CODES:	TS	TWO SPEED OPERATION WITH SOFT START
	VFC	VARIABLE SPEED CONTROL 2-STEP INFINITELY VARIABLE

\* TROLLEY OPTION AVAILABLE AT 40/10 FPM T/S OR 80FPM VFC  
 \*\* BRIDGE OPTION AVAILABLE AT: 65, 115, 135 FPM VFC  
 \*\*\* HOIST OPTION AVAILABLE FOR 40FT LIFT

GENERAL NOTES:

DIMENSIONS "RH" AND "TH" ARE SPECIFIED BY CUSTOMER  
 DIMENSION "A" IS APPROX. AND DOES NOT CONSIDER MAINLINE  
 WHEEL LOAD "R" DOES NOT INCLUDE IMPACT  
 CRANE ALSO AVAILABLE AT 230/3/60 AND 575/3/60 POWER  
 ENDTRUCKS FOR RUNWAY FLANGE WIDTH 4.6"-12"